



# *Atticus*

LUXURY ACRYLIC LAMINATES



ULTRA CLEAR ACRY-GLASS

COLLECTION | 2024





#### 100% Acrylic

These Laminates are entirely made of acrylic polymers without additives, resulting in long lasting quality and transparency.



#### 1.5MM Segment

The laminates are available in 1.5 mm thickness & 8x4 feet size.



#### Borer Free

Our laminates are resistant to attacks by termites and other borers.



#### Water & Stain Proof

A special coating on the surface ensures our laminates stay water and stain resistant for years.



#### Easy to Install

The sheets are seamless and integrate very well, making the installation easy.



#### Scratch Resistant

The surface is toughened to prevent scratch formation even after years of installation.

## ABOUT FRIKLY

Frikly is the one-stop destination for home interior products. We offer the market's most affordable prices, FREE nationwide delivery, and the widest catalogue.

Headquartered in Nagpur, Maharashtra, Frikly embodies trust, reliability, and consumer satisfaction at its core. We are backed by the founder, CEO, and former COO of Wayfair, one of the leading e-commerce platforms for interiors and renovation across USA, Canada & Europe. Finding the right choice for your dream home interiors should not be tedious. Therefore, Frikly's mission is to make international standard interior products available to you without any hassle.

Our products reach you in secure flexi plywood packaging, from warehouses located in all prime metro cities. This ensures you receive your order wherever you are across the country.

Place an order by clicking the "Get Quote" button. You may order our Physical Catalogues as well.

Just WhatsApp or Call us at +91-8600011431.



Lower Prices than  
the Local Market



Catalogue of  
15 Lakhs+ Products



50,000+  
Deliveries Fulfilled



Delivered Across  
10,500+ Pincodes



75000+ Satisfied  
Customers



FA-601



FA-602



FA-603



FA-604



FA-605



FA-606



FA-607



FA-608



FA-609



FA-610




FA-611



FA-612




FA-613



FA-614



FA-615



FA-616



FA-617



FA-618



FA-619



FA-620



FA-621



FA-622



FA-623



FA-624



FA-649



FA-650



FA-651



FA-652



FA-653



FA-654



FA-655



FA-656




FA-657



FA-658



FA-659



FA-660



FA-661



FA-662



FA-663



FA-664



FA-665



FA-666



FA-667



FA-668



FA-669



FA-670



FA-671



FA-672




FA-625



FA-626



FA-627



FA-628



FA-629



FA-630



FA-631




FA-632



FA-633



FA-634



FA-635



FA-636



FA-637



FA-638



FA-639




FA-640



FA-641



FA-642



FA-643



FA-644



FA-645



FA-646



FA-647



FA-648



FA-701



FA-702



FA-703



FA-704



FA-705



FA-706



FA-707



FA-708



FA-709



FA-710



FA-711




FA-712




FA-713



FA-714



FA-715



FA-716



FA-717



FA-718



FA-719



FA-720



FA-721



FA-722



FA-723



FA-724



## CLEANING INSTRUCTION & MAINTENANCE

Atticus acrylic laminates have a high quality protective film which is only removed at the completion of all installation work. After removal of the film, the solvent of adhesive coating still remains on the surface of the laminates. Dust is likely to settle on the surface at this stage.

Curing out a laminate surface involves allowing the applied resin to fully harden.

This often requires sufficient time (approx. 72 hours) so that the resin sets and reaches its optimal strength. Temperature and humidity can influence the curing time.

To speed up the process, clean the surface with a glass cleaner like Colin and a soft microfiber cloth.



SHAKE WELL AND LIGHTLY  
SPRAY ON THE SURFACE.



WIPE THE SURFACE CLEAN IN  
CIRCULAR MOTIONS, WITH A  
MICROFIBER CLOTH.

## WARNING

Avoid using the following products for cleaning:

- Alcohol Based Cleaners
- Solvent Based Cleaners
- Petrol, pinewood, or oil based cleaners
- Non-microfiber cloths

## AVAILABLE IN

- Size: 2440 × 1220 mm (8ft × 4ft)
- Thickness: 1.5 mm

## WHY DO AIR BUBBLES FORM ON LAMINATES?



Substrate losing moisture after installation



Debonding due to uneven surfaces



Using extremely large sheets (larger than 4ft x 4ft)



Insufficient pressing during bonding process

## CAUSES OF YELLOW PATCHES AND COLOUR FADING AFTER INSTALLATION



Direct exposure to sunlight



Using poor quality dipped plywood/lipping patti, which may chemically relate with the adhesive



Using synthetic rubber adhesives



Exposure to high temperature



Placing hot utensils/cookware on the laminate

## FRIKLY WARRANTY

Imported products do not come with a warranty from the supplier, therefore we do not provide any warranty/guarantee either. Application errors, weather problems, and low-skill workmanship may cause cracks and air bubbles in the laminates. We do not entertain complaints or claims for such damages. In case of manufacturing defects, the claims will be entertained up to one year from the date of purchase.

## WHY DO CRACKS OR STRETCH LINES FORM ON ACRYLIC LAMINATES?




Rolling up acrylic laminate sheets while storing can cause cracks and stretch lines. To avoid this, unroll the packaging within 2-3 days of receiving the delivery.

Recommended  
ADHESIVE For  
Pressing



STRONG  
BONDING

## PANEL STRUCTURE

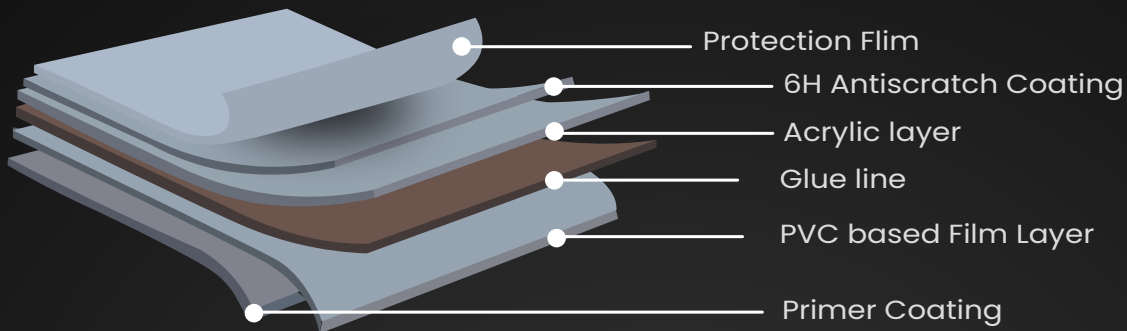

## PARAMETER COMPARISON

| Parameters                        | Atticus Acrylic Laminate | High Gloss Laminate Mica | PU coating/ Duco Paint |           |
|-----------------------------------|--------------------------|--------------------------|------------------------|-----------|
| Gloss Level                       | >90                      | >70                      | >85                    | >85       |
| Scratch Proof                     | 6H Antisractch           | NO                       | NO                     | NO        |
| Color Consistency                 | Excellent                | Not good                 | Not good               | Not good  |
| Orange peel                       | No                       | Yes                      | Yes                    | No        |
| UV Resistance                     | Excellent                | Bad                      | Bad                    | Bad       |
| Water Resistance                  | Excellent                | Bad                      | Bad                    | Excellent |
| DRY Heat Resistance               | Excellent                | Good                     | Bad                    | Bad       |
| Volatile Organic Compounds (VOCs) | NO                       | YES                      | YES                    | YES       |

\*There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the laminate sheet may vary from this brochure.



ENVIRONMENTAL SIGN



CARBON EMISSIONS



## More Products on Frikly

LOUVERS & PLANKS

LAMINATES & MICA

VENEERS

HOME APPLIANCES

SANITARYWARE

HARDWARE

DECOR & FURNISHING

 [www.frikly.com](http://www.frikly.com) |  [info@frikly.com](mailto:info@frikly.com)

 Friklyindia

 Friklyindia

 Friklyindia

 +91-8600011431

It is advisable to use material from the same batch, as there might be colour variation in the material from different batches.